

DRY PRESSURE GAUGE

2 1/2" Chrome Plated Steel Case - Lower Mount



Utility Gauge For Wide Range of Applications

CARBO Instruments Datasheet D25-CSL 01.2021

Product Features & Applications

- ASME B40.1 Grade B Accuracy Compliance
- Chrome Plated Steel Case - Durable
- Large Dial Print
- Reliable and Economical
- Applications: Oil, Water, Air, Compressor, Hydraulics, HVAC, Gaseous & Liquid media that are not highly viscous or crystallizing and not corrosive or oxidizing to copper alloy parts.

Specifications

Accuracy

ASME B40.1 Grade B Accuracy $\pm 3-2-3$ % of span

Dial Size

2 1/2" (63 mm)

Connection

1/4" NPT Lower Mount

Scale

Dual Scale: psi / bar with kPa guidance

Case Design

Chrome Plated Steel, Crimped Style Casing

Material

Movement: Copper Alloy
Bourdon Tube: Copper Alloy
Connection: Copper Alloy
Window: Glass Lens
Casing: Steel Case
Pointer: Aluminum

Permissible Ambient Temperature:
-4°F to 140°F (-20°C to 60°C)

Fill: Dry

Manufactured in an **ISO 9001 Certified** factory to meet and exceed your expectation

Options: - Custom Dial Layout - Anti Vibration - see L25 Series
- Special Connection Size - Adapters & Mounting kit


Specifications subject to change without notice at any time, and information provided may vary from the actual Product.

Warning: This product contains chemicals such as lead in brass component known to the state of California to cause cancer and birth defects or other reproductive harms.


CARBO USA LLC

1541 Prudential Dr
Dallas, TX 75235
Tel: (972) 803-4040

carbousa.com

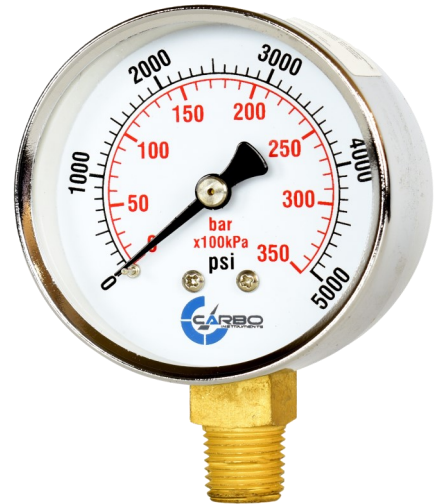

Range / Scale	Part Number
- 30Hg Vacuum	D25-CSL-V00
- 30Hg / 15psi	D25-CSL-V15
- 30Hg / 30psi	D25-CSL-V30
- 30Hg / 60psi	D25-CSL-V60
- 30Hg / 100psi	D25-CSL-V100
- 30Hg / 160psi	D25-CSL-V160
15 psi	D25-CSL-015
30 psi	D25-CSL-030
60 psi	D25-CSL-060
100 psi	D25-CSL-100
160 psi	D25-CSL-160
200 psi	D25-CSL-200
300 psi	D25-CSL-300
400 psi	D25-CSL-400
600 psi	D25-CSL-600
1000 psi	D25-CSL-1.0K
1500 psi	D25-CSL-1.5K
2000 psi	D25-CSL-2.0K
3000 psi	D25-CSL-3.0K
4000 psi	D25-CSL-4.0K
5000 psi	D25-CSL-5.0K
6000 psi	D25-CSL-6.0K

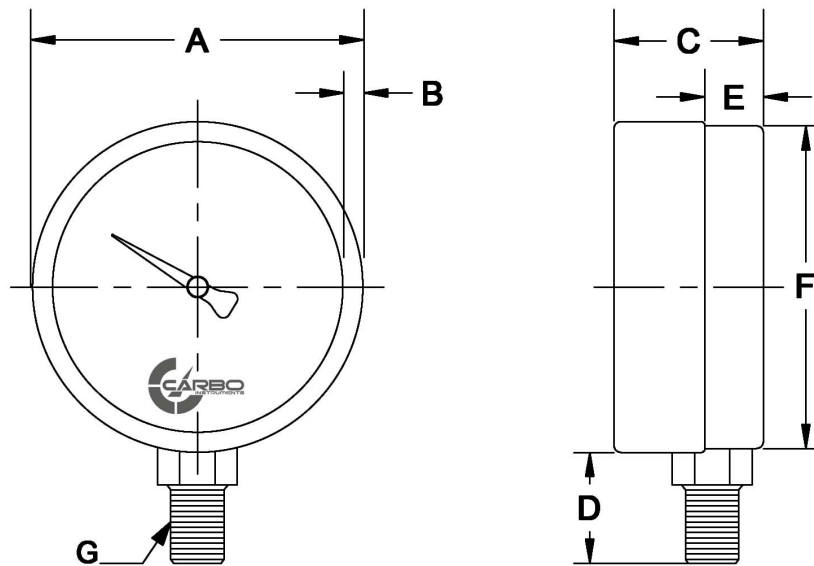

D25-CSL	A	B	C	D	E	F	G
2 1/2" Inch	2.50	0.12	1.13	0.84	0.45	2.43	1/4 NPT

Drawings, sizes, dimensions and all other specifications are subject to change without notice at any time, and information provided may vary from the actual